


NEWS



## HIGH FLOW GAS PORTABLE TEST UNIT

CODE	MA.W.P. (bar)	AIR CONN.	INLET CONN.	OUTLET CONN.	GAUGE RANGE	DISPLACEMENT PER STROKE
GPTU-040-2	480 bar	½" GAS	¼" GAS	¼" GAS	0:600 bar	98 CM <sup>3</sup>
GPTU-050-2	550 bar	½" GAS	¼" GAS	¼" GAS	0:1000 bar	72 CM <sup>3</sup>
GPTU-075-2	725 bar	½" GAS	¼" GAS	¼" GAS	0:1000 bar	51 CM <sup>3</sup>
GPTU-080-2	600 bar	½" GAS	¼" GAS	¼" HP	0:1000 bar	98 CM <sup>3</sup>
GPTU-100-2	750 bar	½" GAS	¼" GAS	¼" HP	0:1000 bar	72 CM <sup>3</sup>
GPTU-150-2	1050 bar	½" GAS	¼" GAS	¼" HP	0:1600 bar	51 CM <sup>3</sup>

STANDARD OPTION
GAS INLET GAUGE
HIGH PRESSURE INLET RELIEF VALVE
GAS INLET ISOLATING BALL VALVE
GAS INLET FILTER
AIR FILTER AND AIR LUBRICATOR
GAS BOOSTER PRESSURE AIR REGULATOR
CE MARKING
GRAPHIC SYNOPTIC
HIGH PRESSURE DISCHARGE VALVE
HIGH PRESSURE OUTLET RELIEF VALVE
MAIN GAUGE SIZE 100 MM
HIGH PRESSURE BULKHEAD EXAGON BLOCK

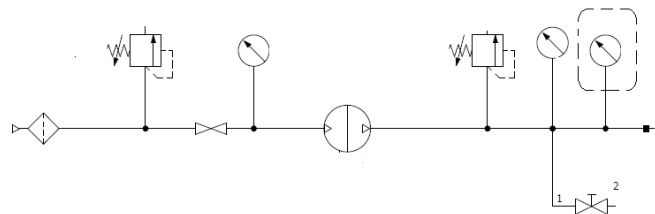

multi-coupling system SRL




ISO 9001

**Multi-coupling system s.r.l.**  
20020 VILLA CORTESE (MI)-Via dell' Artigianato 8/C (ITALY)  
Tel: 0331404830 – Fax: 0331404867  
[www.multicoupling.com](http://www.multicoupling.com) [info@multicoupling.com](mailto:info@multicoupling.com)



HIGH FLOW GAS PORTABLE TEST UNIT REV.0



OUTLET AND DISCHARGE PORT

<b>STANDARD FEATURE</b>
<b>MAX AIR CONSUMPTION 2400 NL/MIN</b>
<b>AIR SUPPLY 1,5 – 7 BAR</b>
<b>GAS SUPPLY 15 - 200 BAR</b>
<b>MAX COMPRESSION RATIO 20</b>
<b>WEIGHT 60 KG (APPROX)</b>
<b>SUITABLE FOR ALL INERT GAS(N<sub>2</sub>, He, Ar, Air)</b>

<b>EXTRA OPTION</b>
<b>BATTERY GAUGE RECORDER (UP TO 2000 BAR)</b>
<b>TRANSPORT CART</b>
<b>HP TRANSDUCER</b>
<b>STAINLESS STEEL STRUCTURE</b>
<b>FLEXIBLE HOSE</b>
<b>HIGH PRESSURE ISOLATING VALVE</b>
<b>HIGH PRESSURE CONTROL PANEL</b>
<b>OEM SOLUTION</b>



MULTI OUTLET OEM SOLUTION



HIGH PRESSURE CONTROL PANEL



**multi-coupling system** SRL